

# CDR 133/163


Aluminium drill stand combining rigidity, precision and ease of use. Accurate and smooth drilling guide of four high performance nylon rolls. Easily accessible guiding wheels for wear compensation adjustment.



CDR 133

CDR 163

Ø 130 / 160mm

 8,9-9,6kg

 600mm

0 - 45°

	CDR 133	CDR 163
Item No.	3104 68576	3104 68577
EAN 13 Code	5450248 690726	5450248 690733
Diam. Max (mm)	130	160
Hub (mm)	600	600
Column	Aluminum	Aluminum
Column section (mm)	45 x 60	45 x 60
Base	Dowel + vaccum	Dowel + vaccum
Base dimensions (mm)	230 x 380	280 x 460
Height (mm)	910mm	850mm
Weight	8,9kg	9,6kg
Bit guide	No	No
Motor mounting plate (mm)	Ring 60	Ring 60
Carriage	Aluminum	Aluminum
Carriage Guiding system	Rolls	Rolls
Carriage handle	Yes	Yes
Carriage travel	1:1	1:1
Braces	No	Yes
Tilting	0-45°	0-45°
Spirit level	No	No
Transport wheels	No	No


## FEATURES

- Aluminium column.
- Left and right mounting drive-lever.
- Multi-purpose drive-lever.
- Spirit level.
- Roll-guided carriage.
- Ring mounting motor collar (60mm).
- Transport handle.
- Pre-mounted rig.

## BENEFITS

- Robust, reliable and light weight.
- Easy to use even in confined environments.
- Can be used for levelling and locking screws.
- For accurate column levelling.
- High accuracy drill guiding, little maintenance.
- Quick and easy motor mounting without any additional tools.
- Easy and ergonomic handling.
- Use it directly out of the box.

## PRODUCT FEATURES

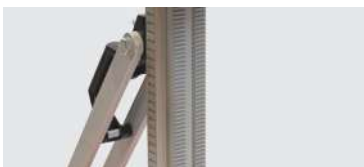

ALUMINIUM COLUMN.



SPIRIT LEVEL.



CARRIAGE GUIDING SYSTEM BY ROLLS.